



## Parlour Curtain Installation

(Note: Steps 1 through to step 5 are all prepared on the ground or flat surface before the installation into the opening.)

- Step 1) Lay curtain out on clean flat surface.
- Step 2) Put 1" pipe into the top hem leaving the pipe shorter by 3" on each side of the finished / framed opening. "Note" Do not trim the curtain at this time.
- Step 3) Put the conduit straps around the upper 1" pipe as shown in the photo FIG #1. You will have to make a small cut in the curtain to do this as shown. Spacing of these straps must be a max of 4'-0" o.c. and to ensure that the upper pipe has one saddle 3" from each end.
- Step 4) To determine the overall centre drive tube length you must lay out the pre-swaged pipe at the base of your opening. You must keep the non operator end 2" shorter than the framed / finished opening. Keep the end of the tube that accepts the actuator back 3 1/2" from the framed / finished opening to allow room for the car body and track (see FIG #2). In short your center pipes finished length must be 5 1/2" shorter than your overall opening width. You must now slide the centre drive tube (3 1/2" pipe) into the centre hem.
- Step 5) Put 1" pipe into the bottom hem leaving the pipe shorter by 3" on each side of the finished / framed opening. "Note" Do not trim the curtain at this time.
- Step 6) You must now carry this assembly to the opening that the curtain is to be installed into. To do this you will have to tie or roll your assembled curtain for ease of transport.
- Step 7) Take the top hem with the upper 1" pipe and conduit straps and using the 1/4" x 1 1/2" lags provided in the curtain package centre this pipe in the opening and lag the conduit straps to the upper header as shown in FIG #3.
- Step 8) The carbody track must now be cut to length. Measure the length required from the underside of the top header to the finished floor. Slide your track into your carbody. To enable this installation you may have to rotate your carbody on an angle closer to horizontal to feed the track into the carbody wheels. You then rotate the carbody and track into a vertical / plumb position to the side jamb. The track is pre-drilled and fastened using 1 3/4" screws at 24" o.c. as shown in FIG #4.
- Step 9) The centre steel curtain clips must be installed along the middle drive tube at 8'-0" o.c. using rivets. Ensure that one clip is installed at each end of the middle drive tube. See FIG #5 shown clip detail.

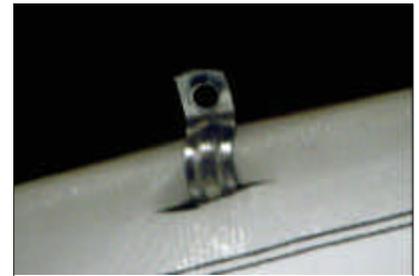


**FIG #1**

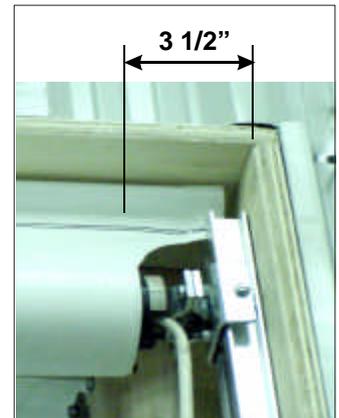

**FIG #2**



**FIG #3**



**FIG #4**



**FIG #5**

## Parlour Curtain Installation

- Step 10) You are now ready to operate your parlour curtain providing you have a licenced electrician to install the required electrical hook-up for your tube actuator.
- Step 11) For each tube actuator there is a set of instructions to illustrate how to set the limit switches that operate the actuators position. The limit switches are shown in FIG #6.
- Step 12) The final step is to install the soft side boots or butcher curtain and jamb trim as shown in FIG #7 and FIG #8. Note that this butcher curtain or boot cover is to be installed at each jamb (operator and none operator sides) and both sides of the curtain.
- Ste[ 13) FIG #9 will show you this finished curtain.



**FIG #6**



**FIG #8**



**FIG #7**



**FIG #9**